


Activation of the TAG 2007

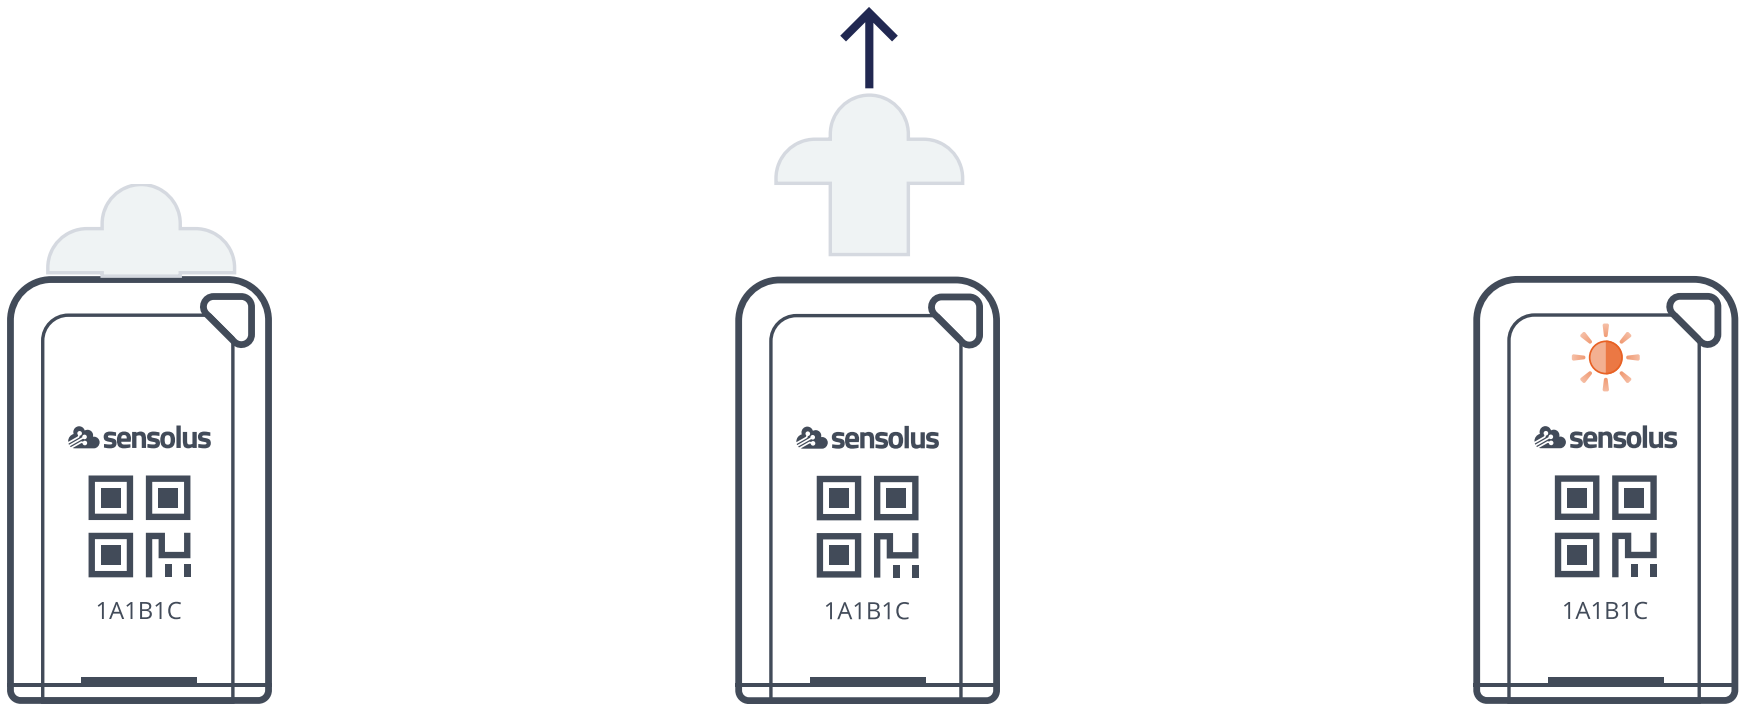


The TAG 2007 is not activated when you receive them. They come with a mylar film to protect battery drainage.

To power on the TAG 2007 take the “mylar film” out.

A Red LED will keep blinking for 2 seconds. The TAG 2007 is now powered.


Mounting the Tag 2007

You can attach the TAG 2007 with double sided tape, industrial graded glue or tie wraps. See [general mounting advice document](#) how to mount the tag.

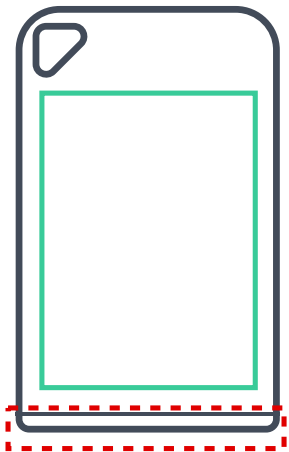

- Do not cover the red area with double sided tape or glue
- The green area is suited for double sided tape or glue. The battery sloth is not covered so replacement is still possible.

Replacing batteries

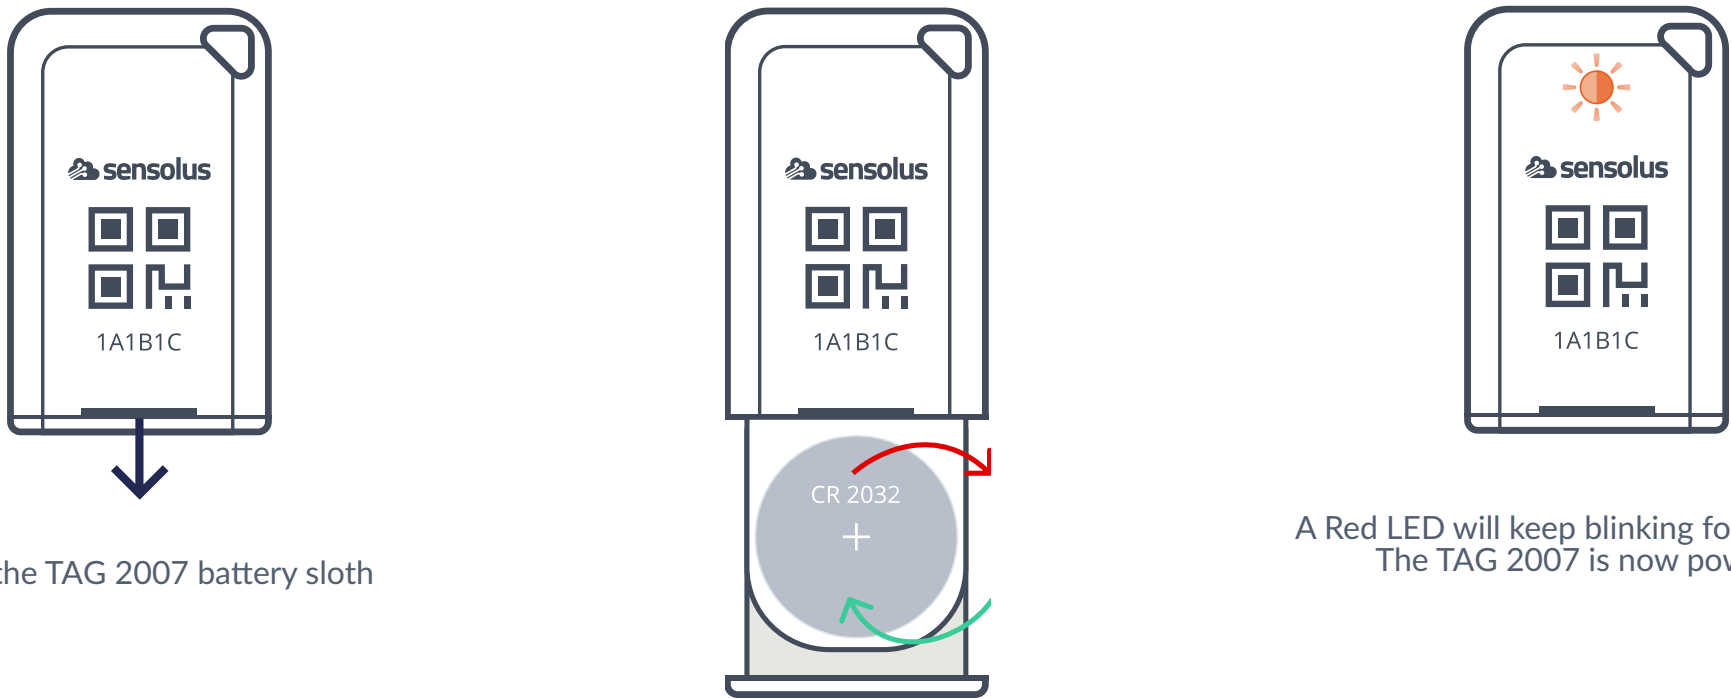

Open the TAG 2007 battery sloth

Replace the battery

A Red LED will keep blinking for 2 seconds. The TAG 2007 is now powered.